



CONTRACTOR(S) SHALL VERIFY EXISTING CONDITIONS AND CORRELATE DIMENSIONS PRIOR TO PROVIDING THE WORK DETAILED IN THESE DRAWINGS. AND SHALL PROMPTLY NOTIFY THE ARCHITECT OF ANY DISCREPANCIES.
 © COPYRIGHT SBLM ARCHITECTS P.C. UNAUTHORIZED REPRODUCTION OR OTHER USE OF THIS DRAWING IS PROHIBITED.




ITEM DESCRIPTION						PETCO VENDOR/ PETCO CONTRACTOR RESPONSIBILITIES		CONTRACTOR RESPONSIBILITIES		
Item Description	Key Code	Location	Drawings/Project Manual Ref.	National Account or INVENTORY Agreement	Materials Furnished By PETCO Vendor	Labor Furnished By PETCO Vendor	Materials Furnished by Contractor	Labor Furnished By Contractor		
1	Automatic Sliding Entrance Doors	-	Exterior, 101	08410	INVENTORY Agreement	None	None	Automatic Sliding Entrance Doors, Electrical provisions	Installation, Final Elec. Connections	1
2	Banner Anchors	-	Exterior	05500	-	None	None	All Materials	Installation	2
3	Building Exterior Signage	-	Exterior	10400	National Account	Building Exterior Signage	Delivery, Installation	Structural Substrate, Power Supply,	Final Elec. Connections, Sealant Work	3
4	Cabinets, Countertops, Coat Racks, Shelves	-	107,108,110,112,114, 115,116,117,118	06200, 08710	-	None	None	Cabinets, Countertops, Shelves, Coat Rack, concealed blkg.	Installation	4
5	Cart Corral (Ext.), Cart Bumper (Int.)	-	Exterior, Interior	10300	INVENTORY Agreement	None	None	All Materials	Installation	5
6	Cash Register (POS) System	-	Per Drawings	16000	National Account	Cash Register (POS) System	Installation	Conduit, boxes, pullstrings	Electrical Provisions	6
7	H.M. Door & Frame Finish Hardware	-	Int., Ext.	A2.1, A2.3, 08100, 08710	INVENTORY Agreement	None	None	H.M. Doors, Frames & Door Finish Hardware	Installation	7
8	Computer Equipment	-	111	A2.3, 10300	National Account	Computer & Data Equipment	Assembly, Installation, Final elec. connections	Conduit, box, power supply	Electrical provisions	8
9	Employee Time Clock	-	111	E2.3	National Account	Employee Time Clock	Installation	Conduit, boxes, pullstrings, power supply	Electrical provisions	9
10	Energy Management System	-	119	16600	National Account	Energy Management System (EMS) Devices	Programming, System Startup	Conduit, boxes, wire, power supply	Installation of EMS, Wiring, Final Elec. Connections	10
11	Entrance Floor Mat	-	101	A2.1, 10300	-	None	None	Entrance Floor Mat	Installation	11
12	Fire Alarm & Security System	-	Per Drawings	16000	National Account	Devices, Wiring	Installation	Conduit, boxes, pullstrings, power supply	Final Elec. Connections	12
13	Fire Extinguishers	-	Per Drawings	10300	-	None	None	Fire Extinguishers, brackets, signage	Installation	13
14	Grooming Reception Counter	GR 10	107	A2.1, 10300	National Account	Grooming Reception Counter, Accessory Low Wall & Swing Doors	Delivery	None	Offloading, Assembly, Installation	14
15	Hitching Rings	-	108,109,110	05500	-	None	None	Hitching rings, concealed blocking	Installation	15
16	HVAC Rooftop Units (RTUs)	-	Rooftop	15500	INVENTORY Agreement	None	None	Structural provisions, RTUs	Installation, Roof Flashings	16
17	Information Center	-	102	10300	National Account	Information Center	Installation	Conduit, boxes, pullstrings	Electrical Provisions	17
18	Interior PETCO Store Graphics	-	102	10300	National Account	Interior Graphics	Installation	Unistrut Supports at exposed roof structure	Install and Paint Unistrut Supports	18
19	Light Fixtures & Lamps	-	Per Drawings	16000	INVENTORY Agreement	None	None	General/Night/Emergency/ Light Fixtures & Lamps	Installation, Final Elec. Connections	19
20	Loading Dock Equipment	-	Per Drawings	10300	INVENTORY Agreement	None	None	Loading Dock Equipment	Installation	20
21	Speed Lift (alternate)	-	Per Drawings	A7.2, 10300	INVENTORY Agreement	None	None	Speed Lift, conc. slab, power supply and disconnects	Installation	21
22	Prefabricated Canopy over Lift (alt.)	-	Per Drawings	A7.2, 10300	see project manual	None	None	Canopy structure, roof, flashing, bollards, traffic point	Installation	22
23	Pylon Signage (if appl.)	-	Site	10400	National Account	Pylon Signage	Installation	Foundation, Anchor Bolts, Conduit and power supply, Pylon Signage	Installation, Final Elec. Connections	23
24	Shopping Carts	-	Per Drawings	10300	National Account	Shopping Carts	Delivery, Offloading, Install Shopping Carts	None	None	24
25	Sound & Communication System	-	Per Drawings	16000	National Account	Sound & Communication Equipment., Devices, Wiring	Installation	Conduit, boxes, pullstrings, power supply	Final Elec. Connections	25
26	Store Safe	-	111	10300	National Account	Store Safe	Delivery, Installation	-	-	26
27	Telephone System	-	Per Drawings	16000	National Account	Telephone System	Telephone System Installation, Final elec. connections	Conduit Boxes, Pullstrings, Power Supply, Backboard	Final Elec. Connections	27
27A	Toilet Partitions (if appl.)	-	114,115	A2.1, 10150	-	None	None	Toilet Partitions, concealed blkg.	Installation	27A
28	Toilet Rm. & Other Rm. Accessories	-	114,115,116,117,118,119	A7.1, A9.1 10300	National Account	Towel Disp., Tht. Tis. Disp., Tht. Seat Cov. Disp., Soap Disp.	Delivery	Balance of Accessories, Fasteners, concealed blkg.	Install balance of accessories, store extra install kits & supplies/accessories in restrooms	28
29	Toilet Rm. & Other Rm. Accessories	-	114,115	A7.1, A9.1 10300	INVENTORY Agreement	None	None	Hand Dryer, conduit, boxes	Installation, Final Electrical Connections	29
30	Wall Bumpers	-	Per Drawings	A7.1, 10300	INVENTORY Agreement	None	None	Wall Bumpers	Installation	30
31	Wall Cornerguards	-	Per Drawings	A7.1, 10300	-	None	None	Wall Cornerguards	Installation	31
32	Window Shades	-	102	A2.1, 10300	-	None	None	Window Shades	Installation	32
33	Wire Shelving	-	110,116,117,118	10300	National Account	Wire Shelving	Delivery	Wall Anchors, concealed met. strapping	Offloading, Installation	33
34	Store Fix.: Aquarium Area, Supply Room	AQ1	106	A2.3, 10300	National Account	Freezer	Delivery, Offloading, Installation	None	None	34
		AQ2	106	A2.3, 10300	National Account	Plant Tank	Delivery, Offloading, Installation	None	None	
		AQ3	106	A2.3, 10300	National Account	Bagging Station	Delivery, Offloading, Assembly, Installation	Electrical Provisions	Final Plumbing & Electrical Connections	
		AQ4	106	A2.3, 10300	National Account	Aquatic Tanks	Delivery, Offloading, Assembly, Installation	Plumbing, Elec. Provisions	Final Plumbing & Electrical Connections	
		AQ11	106	A2.3, 10300	National Account	Aquatic Tanks	Delivery, Offloading, Assembly, Installation	Plumbing, Elec. Provisions	Final Plumbing & Electrical Connections	
		AQ12	106	A2.3, 10300	National Account	Feeder Fish, Kai & Turtle Tanks	Delivery, Offloading, Assembly, Installation	Plumbing, Elec. Provisions	Final Plumbing & Electrical Connections	
		-	-	-	-	-	-	-	-	
35	Store Fix.: Break Room	BR #	112	A2.3, 10300	National Account	Refrigerator, Lockers	Delivery, Offloading, Installation	None	None	35
36	Store Fix.: Retail Area Check Lane	CL #	102	A2.3, 10300	National Account	Check Lanes (Cash Wraps), Power Pole	Delivery	Electrical Provisions, Electrical Receptacles	Offloading, Assembly, Installation, Install Power Poles, Receptacles & Final Electrical Connections	36
37	General Furnishings/ Office	F #	120	A2.3, 10300	National Account	File Cabinet, Desk, Chairs, Table, Etc.	Delivery, Offloading, Assembly, Installation	None	None	37
38	Store Fix.: Retail Area Gondola	G #	102	A2.3, 10300	National Account	Gondola Fixtures	Delivery, Offloading, Installation	Electrical Provisions	Final Electrical Connections	38
	Store Fix.: Grooming Room	GR #	107,108,109,110	A2.3, 10300	National Account	Grooming Fixtures, Equipment	Delivery, Offloading, Assembly, Installation	Electrical Provisions	Final Electrical & Plumbing Connections	
		GR 1	108	A2.3, 10300	National Account	Grooming Table	Delivery, Installation	None	Offloading	
		GR 3,4	109	A2.3, 10300	National Account	Cages	Delivery, Offloading, Installation	Electrical Provisions	Final Electrical Connections	
		GR 5	108	A2.3, 10300	National Account	Grooming Table	Delivery	None	Offloading, Installation	
		GR6	110	A2.3, 10300	National Account	Wash Tubs and Fixtures	None	Blocking Hardware	Installation	
39	Washer and Dryer	GR 6	109	A2.3, 10300	National Account	Washer, Dryer	Delivery, Offloading, Installation and set up	Plumb./Mech./Elec. Provisions	Plumb./Mech./Elec. Provisions and connections, run full cycle to insure operations	39
40	Store Fix.: Reptile Habitats Retail Area	RTL #	102	A2.3, 10300	National Account	Reptile Habitats	Delivery, Offloading, Installation	Electrical Provisions	Final Elec. Connections	40
41	Store Fix.: Small Animal Habitats Retail Area	SA #	102	A2.3, 10300	National Account	Small Animal Habitats	Delivery, Offloading, Installation	Mechanical & Electrical Provisions	Final Mech & Elec. Connections	41
42	Store Fix.: Retail Area	SF #	102	A2.3, 10300	National Account	Litter Bin, Dog Bar, Cat Bar	Delivery, Offloading, Assembly, Installation	None	None	42
		SF4	102	A2.3, 10300	National Account	Store Fixture	Delivery, Offloading, Installation	Power Pole & Electrical Provisions	Final Electrical Connections	
		SF18	102	A2.3, 10300	National Account	Store Fixture	Delivery, Offloading, Installation	None	None	
43	Store Fix.: Wellness Fixture	W #	102	A2.3, 10300	National Account	Wall Fixture	Installation	None	None	43
44	Store Fix.: Pet Clean Up Station	SF #	Exterior	A2.1, 10300	National Account	Pet Clean Up Station	Delivery	Conc. for setting post in ground where applicable	Offloading, Assembly and Installation	44

SBLM Architects #A0003434
 11400 N. Kendall Drive, Suite 310
 Miami, FL 33176
 Telephone 305-412-9187
 Fax 305-412-6731
 www.sblm.com

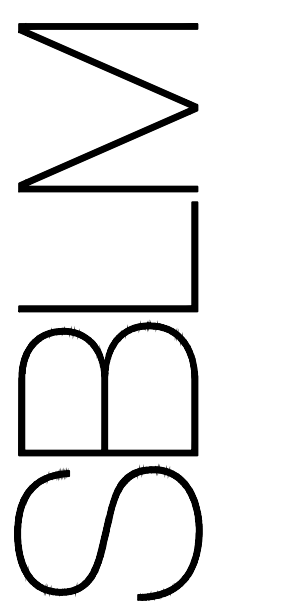

James Cohen
 Lic. #22580

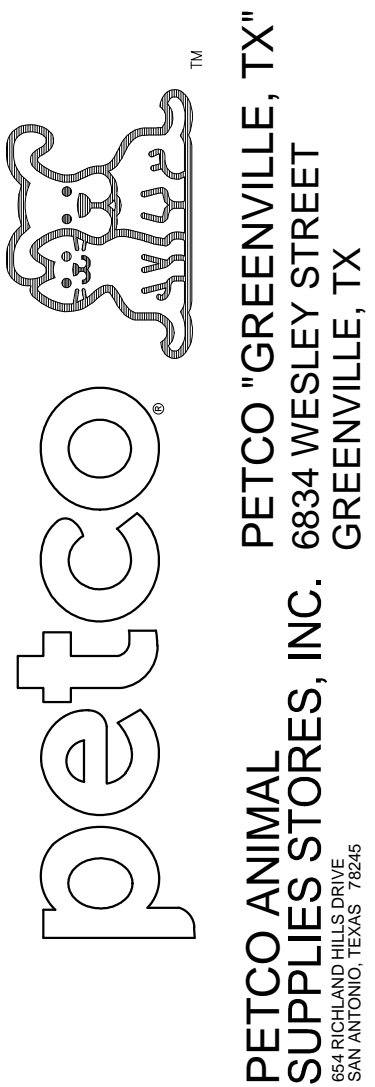

DISTRIBUTION:	DATE:
75% SUBMISSION	08-11-11
98% SUBMISSION	08-16-11
100% SUBMISSION	09-23-11
PERMIT SET	09-28-11
FINAL PERMIT SET	09-20-13
BULLETIN 1	10-22-14

SBLM JOB #	PETCO P.M. JOB #
11107	11458
DRAWN:	CHECKED:
IT	MS

DRAWING TITLE:
PETCO VENDOR/ CONTRACTOR RESPONSIBILITY
A0.2