


1 ROOF FRAMING PLAN

SCALE: 1/4" = 1'-0"

- PLAN NOTES:
1. ALL ROOF TRUSSES SHALL BE WOOD TRUSSES, SPACED AT 24" O.C.
 2. ALL TRUSSES SHALL HAVE BOTTOM CHORD BEARING AT EXTERIOR WALLS AND SHALL HAVE HANGERS AT STEEL BEAMS.
 3. TRUSSES SHALL BE DESIGNED FOR ADDITIONAL LOADS OF MECH. EQUIPMENTS.
 4. TRUSS DEPTH AT LOW POINT SHALL BE 20" DEEP. TOP CHORD OF TRUSSES SHALL SLOPE TO ATTAIN ROOF SLOPE. SEE ARCH. FOR TOP OF ROOF TRUSSES.
 5. SHADED AREA IS DESIGNATED TO RECEIVE MECHANICAL EQUIPMENT. ASSUME 2500# UNIT SUPPORTED OVER MAXIMUM 3 TRUSSES. DESIGN EACH TRUSS FOR 1000# OF ADDITIONAL LOADS PLACED ANYWHERE ALONG THE SPAN (IN SHADED AREA), IN ADDITION TO THE DEAD AND LIVE LOADS.
 6. LOCATION SHOWN THUS HT4 INDICATES SIMPSON HOLD DOWNS AT FOUNDATION.
 7. ALL HEADERS SHALL BE 3-2x8 FOR SPANS UP TO 3'-6" UNO. FOR SPANS LARGER THAN 3'-6" HEADERS SHALL BE 3-2x12 UNO.
 8. SEE GENERAL NOTES FOR ROOF AND WALL SHEATHING AND ATTACHMENTS.
 9. ALL EXTERIOR STUDS SHALL BE 6" STUDS SPACED AT 16" O.C. MAX.

PROGRESS	02-09-2015
PERMIT	02-12-2015

WINDLE + VOLPE
 ARCHITECTS
 7600 9TH STREET
 HOUSTON, TEXAS 77065
 PH 713-955-1390

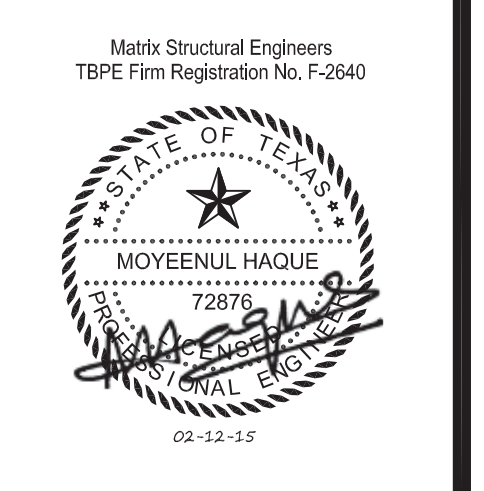

PAD BUILDING AT THE CROSSROADS MALL
 GREENVILLE, TEXAS
GREENVILLE PROPERTIES LTD.
 GREENVILLE, TEXAS

DATE	1/26/15	BY	BN
PROJECT NO.	05-14-05	DRAWN BY	

ROOF FRAMING PLAN
S2.2