

PANEL "2H"

SERVICE: 120/208V, 3P, 4W
 MAINS: 3P, 3W, 60A MCB
 TYPE: SQ D MCCB
 MOUNTING: SURFACE
 PANEL AIG RATING: 10K AIC
 TOTAL CONNECTED LOAD 5.6 KVA

LOAD SERVED	TRIP	HIRE	LOAD KVA	LOAD KVA	HIRE	TRIP	LOAD SERVED
RECEPTS.	20	12	0.6	1-2	0.4	12	LIGHTING CONTROLER
				3-4			CONTACTOR CAB.
				5-6			SPARE
				7-8			
				9-10			
				11-12			
				13-14			
EF.	8	0.4	15-16				
SPARE	12	0.8	17-18				
			19-20				
			21-22				
			23-24				
			25-26				
			27-28				
			29-30				
			31-32				
			33-34				
			35-36				
			37-38				
			39-40				
			41-42				

PANEL "C"

SERVICE: 120/208V, 3P, 4W
 MAINS: 3P, 3W, 60A MCB
 TYPE: SQ D MCCB
 MOUNTING: SURFACE
 PANEL AIG RATING: 10K AIC
 TOTAL CONNECTED LOAD 8.0 KVA


LOAD SERVED	TRIP	HIRE	LOAD KVA	LOAD KVA	HIRE	TRIP	LOAD SERVED
SIGNAGE	20	8	1.0	1-2	1.0	8	CANOPY LTS.
				3-4	1.0	8	SPARE
				5-6			
				7-8			
				9-10			
				11-12			
				13-14			
				15-16			
				17-18			
				19-20			
				21-22			
				23-24			
				25-26			
				27-28			
				29-30			
				31-32			
				33-34			
				35-36			
				37-38			
				39-40			
				41-42			

PANEL "POS"

SERVICE: 120/208V, 3P, 4W
 MAINS: 100A MLO
 TYPE: SQ D MCCB
 MOUNTING: SURFACE
 PANEL AIG RATING: 10K AIC
 TOTAL CONNECTED LOAD 14.6 KVA

NOTE:
1. PROVIDE ISOLATED GROUND BAR

LOAD SERVED	TRIP	HIRE	LOAD KVA	LOAD KVA	HIRE	TRIP	LOAD SERVED
SALES LTS.	20	12	1.0	1-2	1.0	10	TVSS
				3-4	1.0	10	SPARE
				5-6			
				7-8			
				9-10			
				11-12			
				13-14			
				15-16			
				17-18			
				19-20			
				21-22			
				23-24			
TEL EQUIPMENT			0.4	25-26	0.4	12	TEL EQUIPMENT
POS EQUIPMENT			0.4	27-28			SPARE
			0.4	29-30			
				31-32			
				33-34			
				35-36			
				37-38			
				39-40			
				41-42			

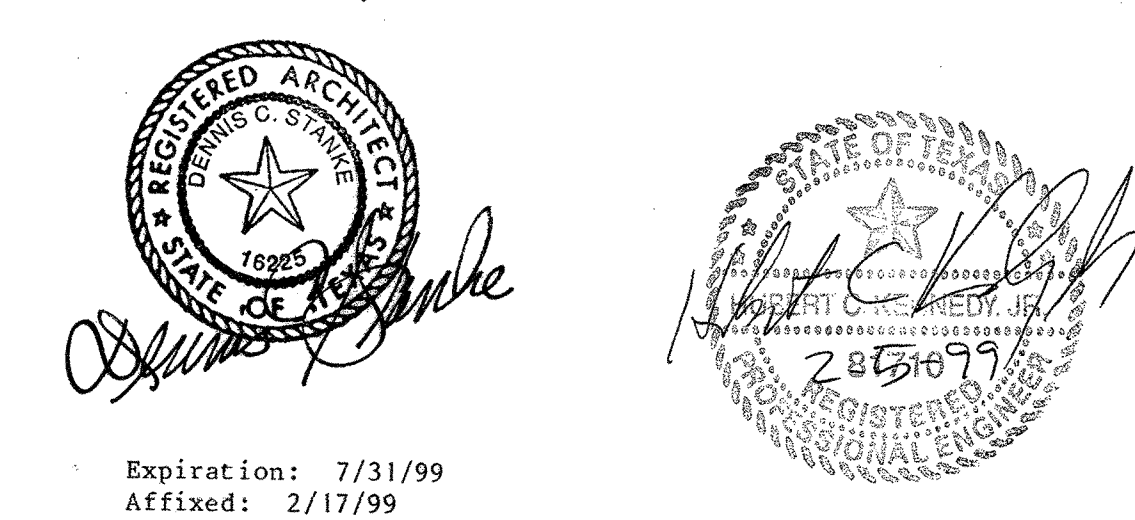

PROJECT: BELK CROSSROADS MALL GREENVILLE, TX NEW INSTALLATION
 SHEET TITLE: PANEL SCHEDULES
 SHEET NO: 1 OF 4
 DRAWING NO: 2081879
 DATE: 7/99
 REVISIONS: 1
 DESIGNED BY: [Signature]
 CHECKED BY: [Signature]
 APPROVED BY: [Signature]
 EXPIRES: 7/31/99
 AFFIXED: 2/17/99
 ARCHITECTURAL SHEET NUMBER: E-14
 OF 19 SHEETS